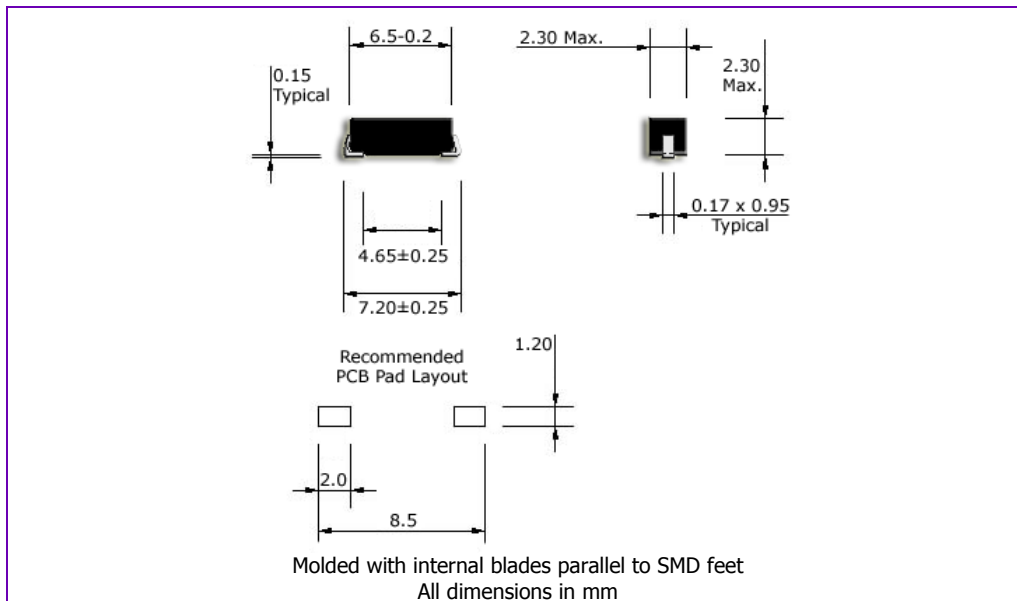


R5-J Ultra-Miniature SMD Reed Sensor

J-Leads, Normally Open, 5W



- ◆ Does not require power for operation
- ◆ Normally open (NO) form A contact
- ◆ Omni-polar device; actuates with either pole of magnet
- ◆ Molded with internal blades parallel to SMD feet
- ◆ Packed in tape and reels conforming to IEC-60286-3 norms
- ◆ Lead (Pb) free and RoHS compliant

Applications

This reed sensor is suitable for use in the following applications and many others: cellular phones and PDAs, dentist drills, pacemakers and defibrillators, nerve stimulators, spirometers, high resolution level sensors...

Specification

Contact Form		A
Contact Rating (max)	W / VA	5.0
Switching Current (max)	A	0.35
Carry Current (max)	A	0.5
Switching Voltage (max)	V _{DC}	100
Breakdown Voltage (min)	V _{DC}	150
Initial Contact Resistance (max)	mΩ	200
Operating Temperature	°C	-40 to +140
Shock Resistance (½Sin wave for 11ms)	g	30
Vibration Resistance (10-2000Hz)	g	20

Ordering Code

R5-J-(Operate AT Code)-(Packing Code)

OAT Code	*Before	*After	Packing Code	
1	7 - 12	15 - 40	L	Plastic Box (500)
2	12 - 17	30 - 50	G	Tape (2500)

*Indicate Operate AT band before and after modification of leads

Example

R5-J-1-G denotes 7-12 Operate AT packed in taped reels.

Due to continual improvement, specifications are subject to change without notice

www.rre.in


27 December 2013

R5-J Ultra-Miniature SMD Reed Sensor


Actuation Distances

Operate and release distances for the R5-J ultra-miniature reed sensor in two standard AT bands, when actuated (as shown in the sketches) with NdFeB standard magnets is shown below. All distances given are in mm with tolerances of ± 0.5 mm. Although some of the AT band / magnet combinations will produce similar actuating distances, selecting the right AT band and magnet for an application is important and can be done by going through our AT band FAQ and our magnet selection guide.

R5J-1 (7-12 AT)

Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
	NDR-T	4.0 x 1.5 x 1.5	2.0 – 4.5	2.0 – 5.0
	NDC-T	Ø2.0 x 4.0	2.5 - 5.0	2.5 – 5.5
	NDR-S	6.0 x 2.5 x 2.5	5.0 – 8.0	5.0 – 8.5
	NDC-S	Ø3.0 x 7.0	5.5 – 9.0	5.5 – 9.5
	NDR-M	8.0 x 3.0 x 3.0	6.5 – 11.0	6.5 – 11.5
	NDC-M	Ø4.0 x 10.0	9.0 – 13.0	9.0 – 13.5
	NDR-L	19.0 x 4.0 x 4.0	11.5 – 18.5	11.5 – 19.0
	NDC-L	Ø8.0 x 15.0	18.0 – 26.0	18.0 – 26.5

R5J-2 (12-17 AT)

Actuation Sketch	Magnet	Dimensions	Operate Distance	Release Distance
	NDR-T	4.0 x 1.5 x 1.5	1.5 – 3.0	1.5 - 3.5
	NDC-T	Ø2.0 x 4.0	2.0 – 3.5	2.0 – 4.0
	NDR-S	6.0 x 2.5 x 2.5	4.5 – 6.0	4.5 – 6.5
	NDC-S	Ø3.0 x 7.0	5.0 - 7.0	5.0 - 7.5
	NDR-M	8.0 x 3.0 x 3.0	6.0 – 8.0	6.0 - 8.5
	NDC-M	Ø4.0 x 10.0	8.5 - 10.5	8.5 – 11.0
	NDR-L	19.0 x 4.0 x 4.0	10.5 – 13.0	10.5 - 13.5
	NDC-L	Ø8.0 x 15.0	17.0 - 21.0	17.0 – 21.5

Due to continual improvement, specifications are subject to change without notice

www.rre.in

27 December 2013